

National Institute of Ayurveda, Jaipur

(Deemed to be University)

Ministry of AYUSH, Govt. of India

Jorawar Singh Gate, Old Amer Road, Jaipur (Rajasthan)- 302002

Invitation for Quotation

Sealed quotations are invited from the reputed, eligible interested Companies/Firms for (IT Center) of the Institute as per below mentioned Item -

Scope of Work

Baghel Committee Hall & Auditorium Committee Hall

1. Objective

The National Institute of Ayurveda (NIA), Jaipur has two Conference Meeting Rooms

- Madhav Singh Baghel Committee Room
- Auditorium Committee Hall

Several HDMI cables installed in these conference rooms have been damaged by rodents (rats), resulting in signal interruptions and display issues on some LED screens and display ports. To restore the proper functioning of the audio-visual system, the HDMI cable replacement work shall be carried out through an outsourced agency.

The HDMI connectivity and some devices are installed in these meeting rooms. The details are listed in the table below.


1. Baghel Conference Meeting Room

S.no	Current Equipment	Quantity
01	HDMI/Aux junction box	20
02	Display Screen	06
03	HDMI Cable in Junction box	15
04	HDMI Cable in Display screen	07
05	Ethernet cable	43
06	Speaker Mic	37
07	Projector	01
08	HDMI splitter (ML-108 HDMI 4k) 1 port IN and 8 Port Out	01
09	HDMI splitter (ML-802 Audio) 1 port Out and 8 Port IN	02
10	Speaker	04
11	Amplifier mic	02
12	15U Network rack power strip	01
13	24 port network switch	01

1. In the Madhav Singh Baghel Conference Meeting Room, **2 HDMI Splitters (Model: ML-802 Audio, 8 HDMI Inputs and 1 HDMI Output each)** are installed. The splitter connections are routed from the HDMI ports installed beneath the conference table to the equipment rack located behind the wall. These HDMI splitters are used to connect a laptop through the HDMI ports provided on the conference table and distribute the video signal to the LED display screens, allowing the laptop's content to be displayed on the connected displays.
2. The Madhav Singh Baghel Conference Meeting Room is equipped with 6 LED display screens and 1 projector for presentation and display purposes. The HDMI and display connections for these devices are routed from the equipment rack located behind the wall through the false ceiling to the respective LED screens and projector.
3. The Madhav Singh Baghel Conference Meeting Room is equipped with two audio amplifiers, which are installed in the equipment rack located behind the wall. The conference table is fitted with 37 microphones, and all microphone connections are terminated in the same equipment rack. The amplifiers and microphones together provide the audio system for meetings and conferences.
4. The Madhav Singh Baghel Conference Meeting Room is equipped with one 24-port network switch, which is installed in the equipment rack. The network connections from the network jack boxes installed on the conference table are terminated in the equipment rack and connected to the 24-port network switch. This switch provides wired network and Internet connectivity for laptops and other network-enabled devices used during meetings.

Handwritten signature
4/8/2026

Madhav Singh Baghel Committee Room

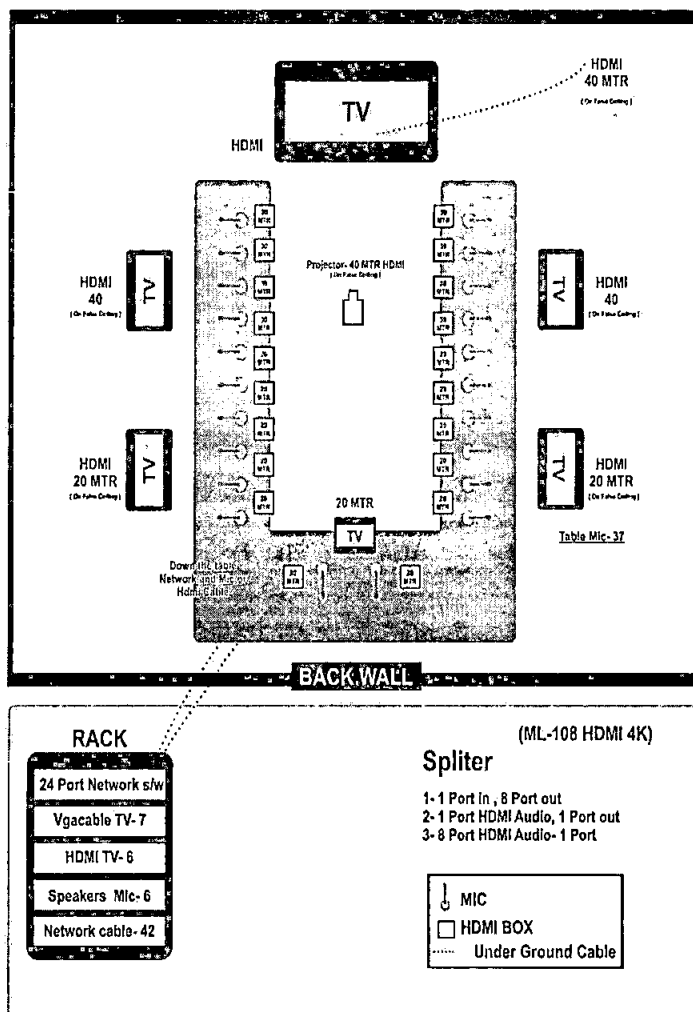

Current Equipment layout

2. Auditorium Conference Meeting Room

S.no	Current Equipment	Quantity
01	HDMI/Aux junction box	20
02	Display Screen	06
03	HDMI Cable in Junction box	15
04	HDMI Cable in Display screen	07
05	Ethernet cable	43
06	Speaker Mic	37
07	Projector	01
08	HDMI splitter (ML-108 HDMI 4k) 1 port IN and 8 Port Out	01
09	HDMI splitter (ML-802 Audio) 1 port Out and 8 Port IN	02
10	HDMI splitter (ML-201 Audio) 2 port Out and 1 Port IN	01
11	Speaker	04
12	Amplifier mic	02


Handwritten signature and date: 4/8/2026

13	15U Network rack power strip	01
14	24 port network switch	01

1. The HDMI Splitter **Model: ML-201 Audio (1 HDMI Input and 2 HDMI Outputs)** is installed behind the Room in network rack. In Auditorium Conference Meeting Room. The HDMI splitter is used to distribute a single HDMI input signal to multiple LED screens/displays, enabling all connected displays to show the same content simultaneously.
2. In the Auditorium Conference Meeting Room, an HDMI Splitter (Model: ML-801 Audio, 1 HDMI Input and 8 HDMI Outputs) is installed above the false ceiling. This splitter distributes the HDMI signal to all the LED display screens and the projector. The output of this HDMI splitter is further connected to a 2-port HDMI splitter installed in the equipment rack, enabling HDMI signal distribution to all connected display devices.
3. In the Auditorium Conference Meeting Room **2 HDMI Splitters (Model: ML-802 Audio, 8 HDMI Inputs and 1 HDMI Output each)** are installed. The splitter connections are routed from the HDMI ports installed beneath the conference table to the equipment rack located behind the wall. These HDMI splitters are used to connect a laptop through the HDMI ports provided on the conference table and distribute the video signal to the LED display screens, allowing the laptop's content to be displayed on the connected displays.
4. The Auditorium Conference Meeting Room is equipped with 6 LED display screens and 1 projector for presentation and display purposes. The HDMI and display connections for these devices are routed from the equipment rack located behind the wall through the false ceiling to the respective LED screens and projector.
5. The Auditorium Conference Meeting Room is equipped with two audio amplifiers, which are installed in the equipment rack located behind the wall. The conference table is fitted with 35 microphones, and all microphone connections are terminated in the same equipment rack. The amplifiers and microphones together provide the audio system for meetings and conferences.
6. The Auditorium Conference Meeting Room is equipped with one 24-port network switch, which is installed in the equipment rack. The network connections from the network jack boxes installed on the conference table are terminated in the equipment rack and connected to the 24-port network switch. This switch provides wired network and Internet connectivity for laptops and other network-enabled devices used during meetings.

HAJ
 Meera
 4/8/2026

Auditorium Committee Room

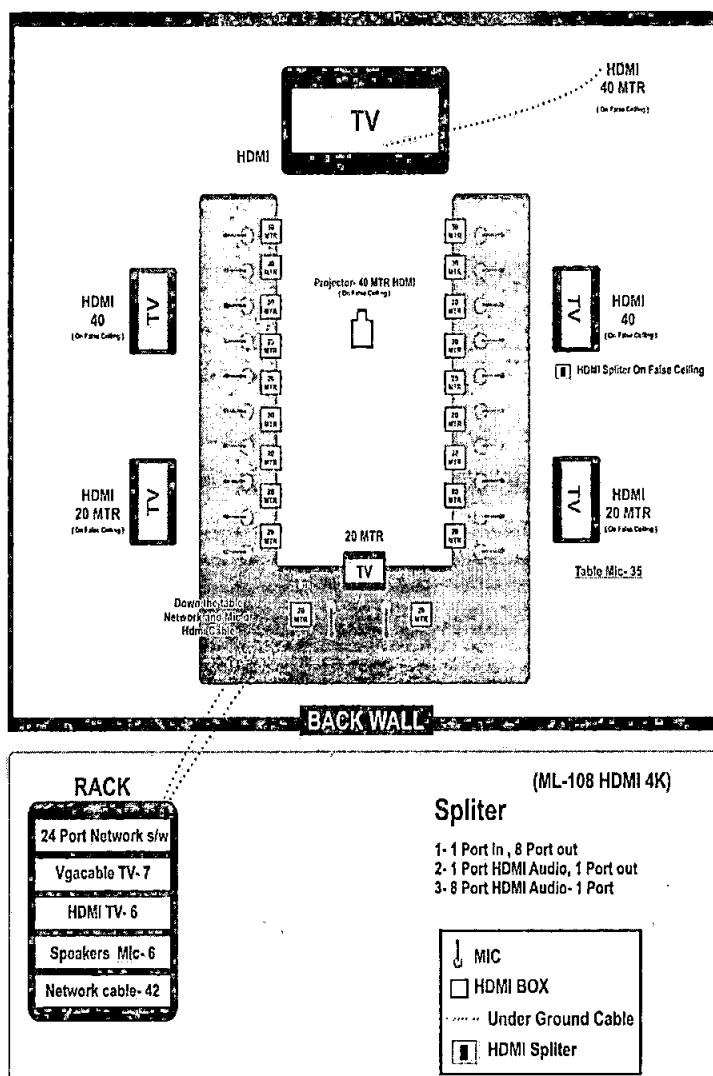

Current Equipment layout

Required items –


The existing HDMI cables in the Madhav Singh Baghel & Auditorium Conference Meeting Room have been damaged by rodents, and the HDMI splitter is also faulty. Therefore, it is necessary to replace the damaged HDMI cables and HDMI splitter with new devices. The list of the required items is provided in the table below.

Committee Room

S.no	Required Equipment	Quantity required in Madhav singh Baghel	Quantity required in Auditorium Conference	Total Equipment Required
01	HDMI switcher/ splitter 16 out +1 IN	1	1	2
02	HDMI switcher/ splitter 16 IN +1 out	2	2	4
03	HDMI cable (4K) 20Mtr	14	14	28
04	HDMI cable (4K) 30Mtr	11	12	23
05	HDMI cable (4K) 40Mtr	2	1	3
06	Conduit pipe 32MM	3	5	8
07	HDMI splitter 4 IN + 1 Out	0	1	1

H.N. Madhav Singh
4/8/2026


Madhav Singh Baghel Committee Room

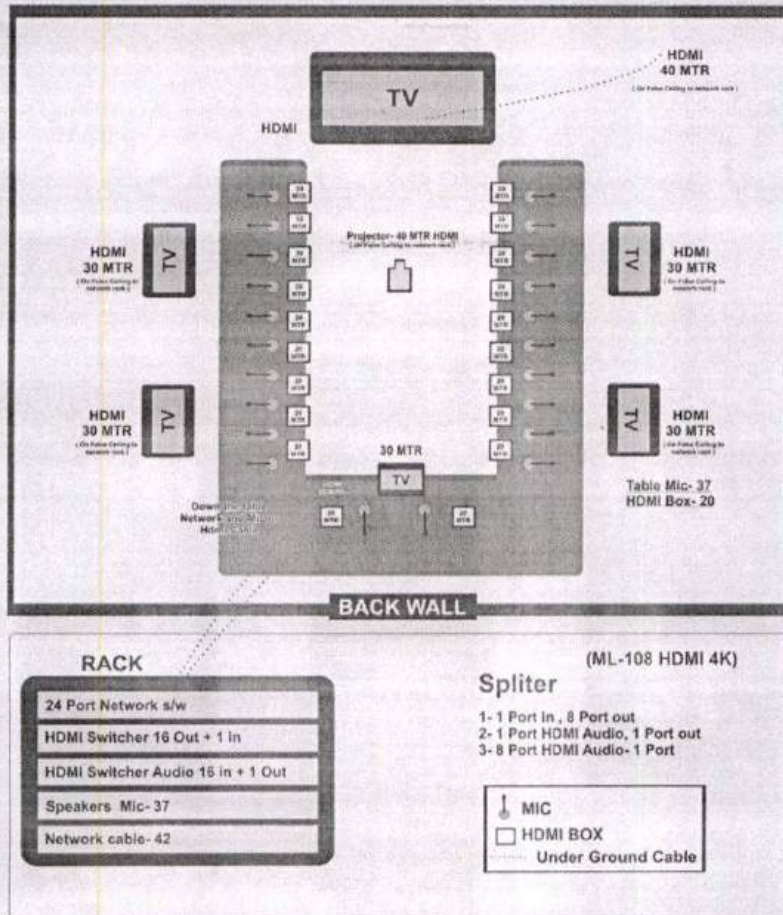

Required Equipment layout

~~Has measure~~
4/8/2026

Auditorium Committee Room

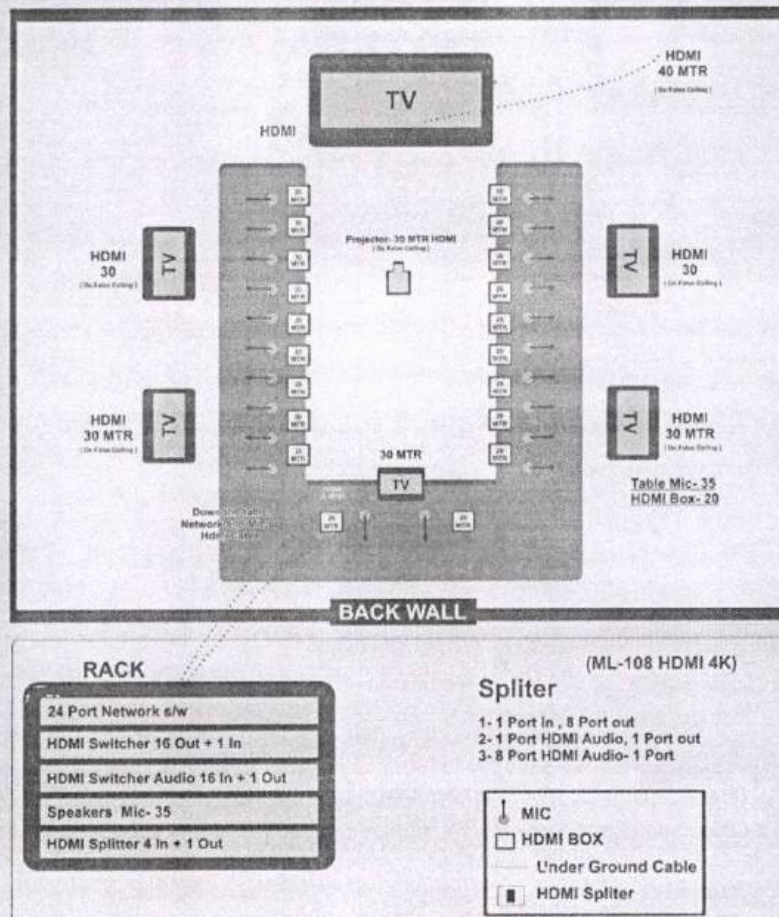

Required Equipment layout

2. Scope of Activities

1. Supply of equipment mentioned in above table.
2. Laying of HDMI cables from Rack to table/floor boxes and Rack to the display devices/TV through existing conduit/pipe infrastructure.
3. Proper routing and labeling of all HDMI cables inside PVC conduits to ensure safe and organized cabling.
4. Installation and termination of audio cables for connection between microphones, amplifiers, speakers, and audio control equipment.
5. Installation and termination of microphone connection points as per approved layout.
6. Labeling of all HDMI, audio, and microphone cables at both ends for easy identification and maintenance.
7. Testing of all HDMI ports for video and audio transmission.
8. Testing of microphone connectivity and audio output through the sound system.
9. Dressing and bundling of cables using cable ties, sleeves, and cable management accessories.
10. Ensuring that all connections are concealed inside conduit/pipe and no loose cables remain visible.
11. Submission of cable route diagram and port numbering details after completion.
12. Final testing, commissioning, and demonstration of the complete system to the concerned authority.
13. The successful bidder shall be fully responsible for any damage, breakage, or deterioration caused during the execution of the work. The bidder shall repair or restore all such damages to the satisfaction of the Institute at their own cost, without any additional financial liability to the Institute.
14. All devices supplied, installed, and commissioned in the Conference Meeting Rooms shall be covered by a comprehensive warranty of 3 (three) years from the date of successful installation and acceptance. After the warranty period, the successful bidder shall provide Comprehensive Annual Maintenance Contract (CAMC/AMC, as applicable) services for an additional period of 3 (three) years.

3. Deliverables

1. HDMI ports installed and operational.
2. Audio connectivity completed and tested.

Handwritten signature: Hal...
4/18/2026

3. Microphone connectivity completed and tested.
4. Proper cable management through conduit/pipe.
5. Testing and commissioning report.

4. Contractor Responsibility

1. All installation work shall be carried out professionally without damage to existing infrastructure.
2. Necessary tools, accessories, connectors, and consumables shall be provided by the Bidder.
3. Any defective component identified during installation shall be replaced by the Bidder.
4. Site cleaning and restoration after completion of work shall be the Bidder's responsibility.

5. Acceptance Criteria

1. The work shall be considered complete only after:
2. Successful testing of all HDMI ports.
3. Successful audio and microphone testing.
4. Proper cable management inside conduits/pipes.
5. Approval from the institute/IT department representative.

General Terms & Conditions:

1. Last date of send the quotation is 21-08-2026. 3:00 PM.
2. The Supplier/ Dealer will have to complete the supply with installation Work at National Institute of Ayurveda, Jaipur.
3. Delivery of goods with installation must be completed within 30 days from date of Purchase Order. After that, liquidated damages (LD) will be charged at the rate of 0.5% per week.
4. The Quotation Price shall be in Rupees including all Taxes and no extra prices such as transportation expenses, are payable by the Institute.
5. After due evaluation of the quotation(s) Institute will award the Work order to the lowest evaluated responsive firm.
6. Payment shall be made after completion of the Supply and submission of bills which will be subject to satisfactory report (certified by the Head of Department or Committee constituted for the purpose)..
7. The Vice Chancellor, NIA Jaipur shall be the final authority to reject full or any part of the order which is not confirming to the requirements and other terms and conditions.
8. No payment shall be made for the unsatisfactory work.
9. GST certificate should be enclosed with quotation.
10. The quotations in sealed envelope, super scribing clearly on the envelope "Quotation of HDMI supply and installation for committee Hall, NIA" in the institute must reach NIA, Jaipur on or before 21-08-2026. 3:00 PM. at the below mentioned address:

The Vice Chancellor, National Institute of Ayurveda (Deemed to be University), Madhav Vilas Palace, Jorawar Singh Gate, Amer Road, Jaipur - 302002

Sd/-

Vice Chancellor

*HA
mees
4/8/2026*